

DVS 600 III



Intelligent video motion detector

Features


- For demanding surveillance tasks with integrated digital picture recording for indoor and outdoor applications
- 6x detection or 12x detection or 6x detection + 6x recording
- Hard disks: 2x 160 GB (standard)
- SCD-25 single control display
- Activated LAN interface
- Activated MPEG-4 picture and audio transmission for low bandwidth
- Equipped with full SEDOR functionality, incl. object classification
- Delivery includes SenViCon software for setting up video channels
- PDA-ready

Options

- Sensor PCB (for further 6 detection channels)
- Expansion of hard disk capacity
- Camera activations
- Bi-directional audio transmission
- MCD-25
- Combination drive CD-RW/DVD-RW
- Terminal adapter (from V5.3.1)
- 19" installation tray
- DFM-1 radio clock unit
- PViewMobile software for PDA-functionality
- VdS installation kit
- PRemote PDA

Item number

- 180.603

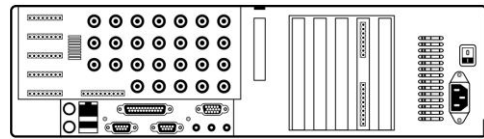

DVS 600 III

Specifications

Picture memory

Resolution	720 (H) x 288/576 (V)
Video standard	CCIR/PAL
Compression	Wavelet, 5 stages - freely configurable for each track
Picture memory	Half or full frame mode

Multiplexer

Camera inputs	6x CVBS (expandable up to 12)
Monitor outputs CVBS	Max. 2x

Other specifications

Memory format	Ring memory 3000, 3 freely configurable long-play tracks
Recording	Permanent, controlled through contacts, motion detection, sensor detection, calendar function configurable for each camera
Recording speed	PAL: up to max. 50 fields/sec (1 camera)
Playback	PAL: up to max. 50 fields/sec (single frames, quick search)
Password protection	4-level individual password entry protects against unauthorised access
Logbook function	Documentation of all messages, password requests and other security-relevant parameters
Search criteria	Date, time, camera number, event, fast research, SmartFinder
Languages	individual adaptations available on request (optional DNI required for data insertion) German, English, French, Spanish (others on request)

Hard disks

Type	2
Storage capacity	2x 160 GB

Interfaces

LAN	Yes
Contact IN	Yes
Contact OUT	Yes
Serial	Yes
Parallel	Yes
USB	2.0
VGA	Yes

Software Options

SenViCon	Included
----------	----------

Options

KE-FS 6	Yes
MCD 25	Yes
PRemote	Included
Combi-drive CD-RW	Yes
Combi-drive DVD-RW	Yes
ISDN	Yes (with only sensor card)
LAN	Included

Other hardware details

Dimensions	W 425 x H 116 x D 445 mm
Temperature	5° C up to +40° C/41° F to 104° F, extended temperature range (VdS compliant) to 55° C/ 131° F
Weight	Appr. 10 - 12 kg, excl. internal HDD expansion
Operating system	Linux
Warranty	36 months